

PCT/IL04/000862

104/862

REC'D 01 NOV 2004

WIPO PCT



מדינת ישראל
STATE OF ISRAEL

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים


This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
particulars of which are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

This 10-10-2004 היום

רשמינה על הפטנטים
Commissioner of Patents

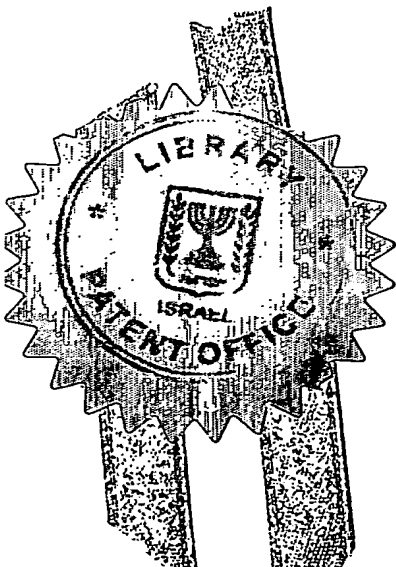

BEST AVAILABLE COPY

נתאשר
Certified

בקשה לפטנט
Application for Patent

לשימוש השלכה
For Office Use

מספר: Number	158052
תאריך: Date	22-09-2003
הוקדם/נדחה: Ante/Post-dated	

אני (שם המבקש, מענו ולגבי גוף מאוגד – מקום התאגדותו)

I (name and address of Applicant, and in case of body corporate, place of incorporation)

Arkal Filtration Systems C.S.
Ltd.
Kibbutz Beit Zera, ISRAEL

ארקל מערכות סינון, אגודה
שיתופית חקלאית בע"מ
קיבוץ בית זרע

Inventor: Ra'anah Ben-Horin

הממציא: רענן בן-חורין


בעל אמצאה מכח _____ הדין _____ ששמה הוא
Owner by virtue of the Law Of an invention the title of which is

בעברית
(Hebrew)

REVERSE FLOW SPIN-CLEANING LIQUID FILTERS
באנגלית
(English)

hereby apply for a patent to be granted in respect thereof

מבקש בזאת שניתן לי עליה פטנט

בקשת חלוקה Appl. For Division	בקשת פטנט מוסף Appl. for Patent Add.	* דרישת דין קדימה Priority Claim		
מבקשת פטנט from Appl.	* לבקשה/פטנט to Patent/Appl.	מספר/סימן Number/Mark	תאריך Date	מדינת האגוד Convention Country
No. 'מס'	No. 'מס'			
dated ... מיום	dated ... מיום			
* יפוי כח: עוד יוגש				
המען למסירת מסמכים בישראל: Address for Service in Israel:				
DANIEL FREIMANN, Adv. .O.Box 29814 Tel Aviv 61297		דניאל פריימן, עו"ד ת.ד. 29814 תל אביב 61297		
on behalf of the Applicant	בשם המבקש	2003 Year	IX Month	16 Day
 DANIEL FREIMANN, Adv. דניאל פריימן, עו"ד		לשימוש השלכה For Office Use		

טופס זה כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל
This form, impressed with the seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

מסנני נוזלים עם סחרורי בזרימה הפוכה

**REVERSE FLOW SPIN-CLEANING LIQUID
FILTERS**

REVERSE FLOW SPIN-CLEANING LIQUID FILTERS

BACKGROUND OF THE INVENTION

The present invention relates to liquid filters, particularly for water irrigation systems, however also useful for other industrial or domestic applications.

More specifically, the invention concerns filter devices of the type disclosed in our US Patent No. 6,398,037 issued June 4, 2002, the contents of which being hereby incorporated by reference (hereinafter called "the Patent").

The Patent relates to filter devices utilizing a battery of filter discs with reverse flushing water flow cycles wherein the discs were caused to spin under the impact of water jets impinging thereon (hereinafter referred to as "Spin-Clean Filters").

For better understanding of the invention herein disclosed, reference shall be made to Fig. 1 which depicts the reverse flow spin-cleaning stage of the filter device (conforming Fig. 10 of the Patent except that the spin-cleaning stage is provoked by the reverse flow proper rather than by an external pressure command, a feature which is understood to be encompassed within the scope of the Patent).

Using the same reference numerals as in the Patent, the water (or other liquid) admitted through the outlet port 20 flows into the conduit 30a (and conduits 30b and 30c that are not shown) and, through an opening 102a (not existing in the Patent exemplified embodiment) into the cylinder space 40 of

the cylinder-and-piston assembly 28. Under a pressure sufficient to overcome the force of the spring 52, the piston 58 along with the cap member 60 will slide towards the distal end of the filter 10, relieving the clamping of the filter discs battery 70. The stroke of piston 58 is delimited by a protrusion 104 formed at the housing member 12 (shown but not referenced in the Patent drawings). As will be explained later on, this need for an extra, exterior element for stopping the progress of the piston has been found disadvantageous and hence remedied by one aspect of the present invention.

Turning now to the proximal end of the filter device 10, there has been used a female screw-threaded ring portion 38 of the fixed member against which the filter discs are pressed for mounting the integral main filter core member 24 to the filter housing structure 14 intermediate female screw-threaded ring 82. This mounting or coupling arrangement has also been found worthy of improvement as will be explained in detail below.

SUMMARY OF THE INVENTION

Thus provided according to one aspect of the invention is a liquid filtering device, particularly for irrigation water installations comprising a cylindrical housing with an inlet port and an outlet port; a cylindrical filter member installed within the housing so that, water flowing from the inlet port to the outlet port enters the filter member in a radial direction, and is discharged through the outlet port, and vice-versa during reversed, filter flushing flow cycles; a core member centrally mounted within the cylindrical

space defined by, and forming a support for, the filter member; a fixed member abutting against the filter member at one axial end thereof; a piston assembly mounted to the core member comprising a piston and a displaceable member coupled to the piston and abutting against the filter member at the other axial side thereof; wherein said mounting of the core member comprises a female screw-thread forming part of the said fixed member; a female screw-threaded split ring matching the female screw-thread; and a circular convergent cone shaped trough encompassing the ring fixedly mounted to said housing; the arrangement being such that upon threading together, the ring becomes attracted towards the fixed member and thus self-tightened by frictionally clamping within the cone-shaped trough.

According to another aspect of the invention the piston assembly is provided with means for limiting the progress amount of the piston, such as a coil spring, the number and size of the coils being designed so as to limit the stroke of the piston following a predetermined compression thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

These and additional constructional features and advantages of the present invention will become more clearly understood in light of the ensuing description of a preferred embodiment thereof, given by way example only, with reference to the accompanying drawings, wherein: -

Fig. 1 is a longitudinal cross-sectional view of the filter device of the Patent in reverse flush flow, spin-cleaning mode of operation;

Fig. 2 is a cross-sectional view of a filter device incorporating the improvements of the present invention;

Fig. 3 shows the split-ring before assembly;

Fig. 4 shows the seat member of the split-ring;

Fig. 5 shows the split-ring in the preparatory state for insertion into the seat member;

Fig. 6 shows the assembled state of the split-ring;

Fig. 7a is a partial cross-section showing the initial state of engagement of the core coupling ring and the split-ring;

Fig. 7b shows the final state of engagement;

Fig. 8 is a schematic view of a group of filter devices installed in parallel; and

Fig. 9 is a schematic view of several filter devices installed in series.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As clearly seen in Fig. 2, the mounting of the filtering discs battery 170 to the inlet/outlet housing member 114 has been modified. Rather than female screw-threaded ring 82 (Fig. 1) there is provided an assembly comprised of seat member 200 and screw-threaded split-ring 202 shown in more detail in Figs. 3-7.

The seat member 200 is formed with a circular trough portion defined by circular rim 200a, convergent cone-shaped wall 200b and planar radial wall 200c.

The seat member 200 is shown as integrally formed with the outlet fitting but other variations may be employed such as by welding.

The ring 202 is split as shown and made of an elastic or springy material to allow its closing by force (Fig. 5) into a reduced diameter which must be smaller than the opening defined by the rim 200a.

The outer surface 202a of the ring 202 is beveled by the same angle as the seat cone wall 200b. The inner side is provided with a screw-thread matching that of the core member ring 138.

The height of the ring 202 is less than the distance between the inner surfaces of the rim 200a and of the radial wall 200c.

The mounting of the core member 124 is perfected in the following manner. First, the split-ring 202 is inserted into the trough portion by forcing it to close and placing thereinside, whereupon the ring will resume its partially open state (Fig. 7a). It is designed so that in this position the screw threads of the ring 138 and of the split-ring 202 will match.

Upon relative rotation, the split-ring becomes dragged along the cone-shaped wall 200b up to a certain point (Fig. 7b). Consequently, a self-tightening effect occurs whereby a highly secured and sealed coupling of the treaded members to each other is attained in a more effective way than in the Patent construction (Fig. 1).

If necessary, stop means such as projection 200d may be provided to avoid the unison rotation of the two parts, at-least at the beginning of the

operation where the friction between the beveled ring portions 202a and the seat wall portion 200b might be insufficient.

The dismantling of the core member 124 from the seat member 200 for maintenance or replacement purposes follows in the reverse order.

Turning now to the distal side of the filter device 110, it will be readily seen that, by properly choosing the number and diameter of the coils, the spring 252 functions as an autonomic stop, limiting the stroke of the piston 158 (and cap member 160).

This seemingly minor and even almost obvious modification presents, however, the advantage of completely dispensing with the stop cap (104 - Fig. 1). Moreover, the length of the piston stroke can be governed and properly selected irrespectively of the housing(s) size.

This variability becomes even more significant where the filter devices are used in groups, either in parallel or in series.

In Fig. 8 a battery of five filter devices 310 is shown (only three are seen) operating in parallel. The filters are mounted on a common base formed in inlet/outlet housing member 314, either by the arrangement described above or otherwise.

Noteworthy in the present context is that the cylinder and piston assemblies 328 incorporate the integral piston-stroke limiting means rather than external stop-by-abutment means (cap 104 in Fig. 1). This entails a significant saving in the design and structure of the other housing member 312.

The filter devices 410 of Fig. 9 operate in tandem between the common inlet and outlet, e.g. to achieve superfine quality of filtered liquid.

This type of construction is only enabled by implementation of the self-limiting piston-stroke means proposed according to the present invention.

Those skilled in the art to which this invention pertains will readily appreciate that numerous changes, variations and modifications can be effected without departing from the true spirit and scope of the invention as defined in and by the appended claims.


WHAT IS CLAIMED IS

1. A liquid filtering device, particularly for irrigation water installations comprising:
 - a cylindrical housing with an inlet port and an outlet port;
 - a cylindrical filter member installed within the housing so that, water flowing from the inlet port to the outlet port enters the filter member in a radial direction, and is discharged through the outlet port, and vice-versa during reversed, filter flushing flow cycles;
 - a core member centrally mounted within the cylindrical space defined by, and forming a support for, the filter member;
 - a fixed member abutting against the filter member at one axial end thereof;
 - a piston assembly mounted to the core member comprising a piston and a displaceable member coupled to the piston and abutting against the filter member at the other axial side thereof;
 - wherein said mounting of the core member comprises a male screw-thread ring forming part of the said fixed member; a female screw-threaded split ring matching the male screw-thread; and a circular convergent cone shaped trough encompassing the ring fixedly mounted to said housing;
 - the arrangement being such that upon threading together, the split-ring becomes attracted towards the fixed member and thus self-tightened by friction clamping within the cone-shaped trough.

2. The device as claimed in Claim 1 wherein the said trough is open at at-least one side thereof allowing the split ring to be inserted therein by elastically squeezing same into a smaller diameter.
3. The device as claimed in Claim 2 wherein the said trough is integrally formed with a fitting communicating the core with the outlet port of the filter member.
4. The device as claimed in Claim 3 wherein a stop is provided within the trough for avoiding free rotation of the split ring.
5. The device as claimed in Claim 1 wherein the piston assembly is provided with means for limiting the progress amount of the piston.
6. The device as claimed in Claim 5 wherein said means comprise a coil spring, the number and size of the coils being designed so as to limit the stroke of the piston following a predetermined compression thereof.
7. The device as claimed in any of Claims 1-6 in use as one of a plurality of filter devices operating in parallel.
8. The device as claimed in any of Claims 1-6 in use as one of a plurality of filter devices operating in series.

9. The liquid filtering device substantially as herein described with reference to Figs. 2-9 of the attached drawings.

For the Applicant,


Daniel Freimann, Adv.

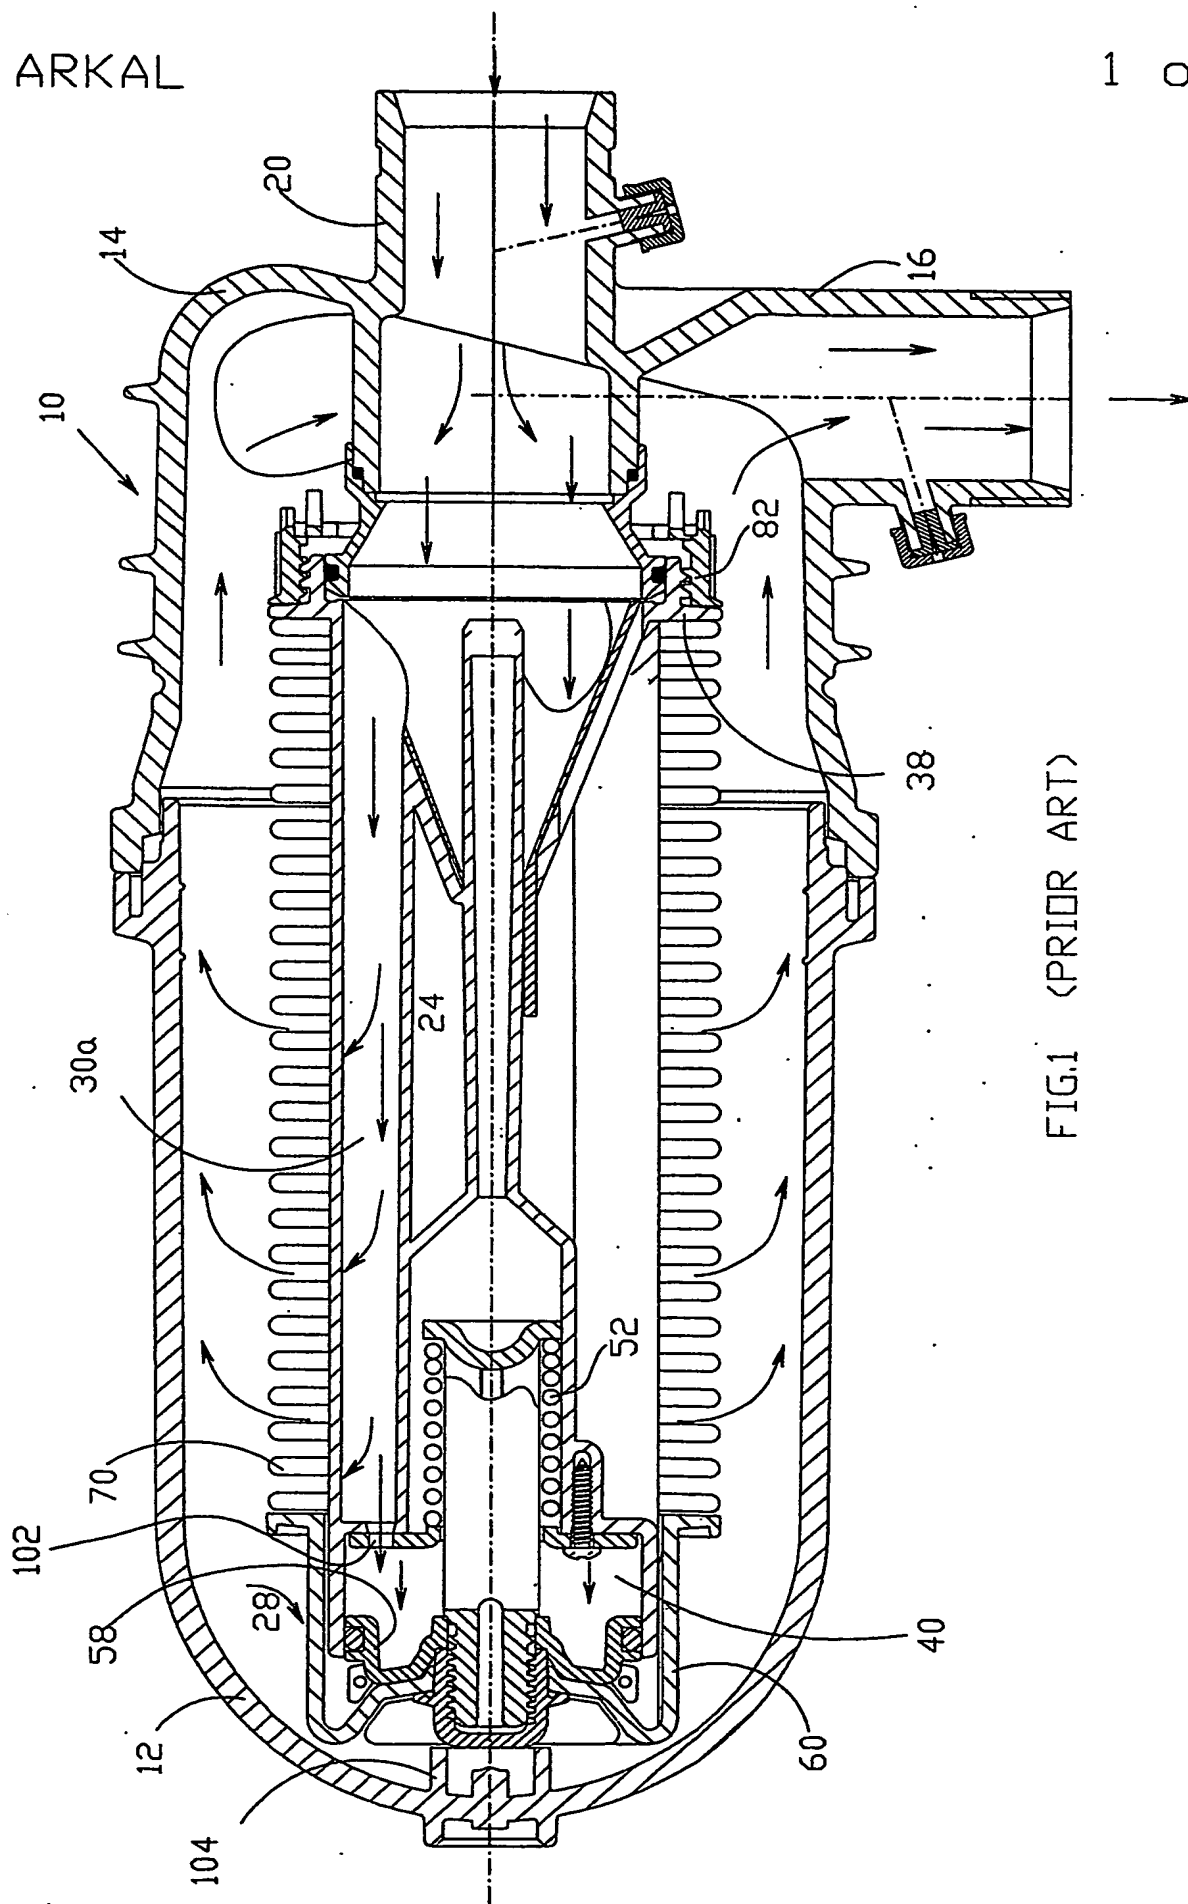


FIG.1 (PRIOR ART)

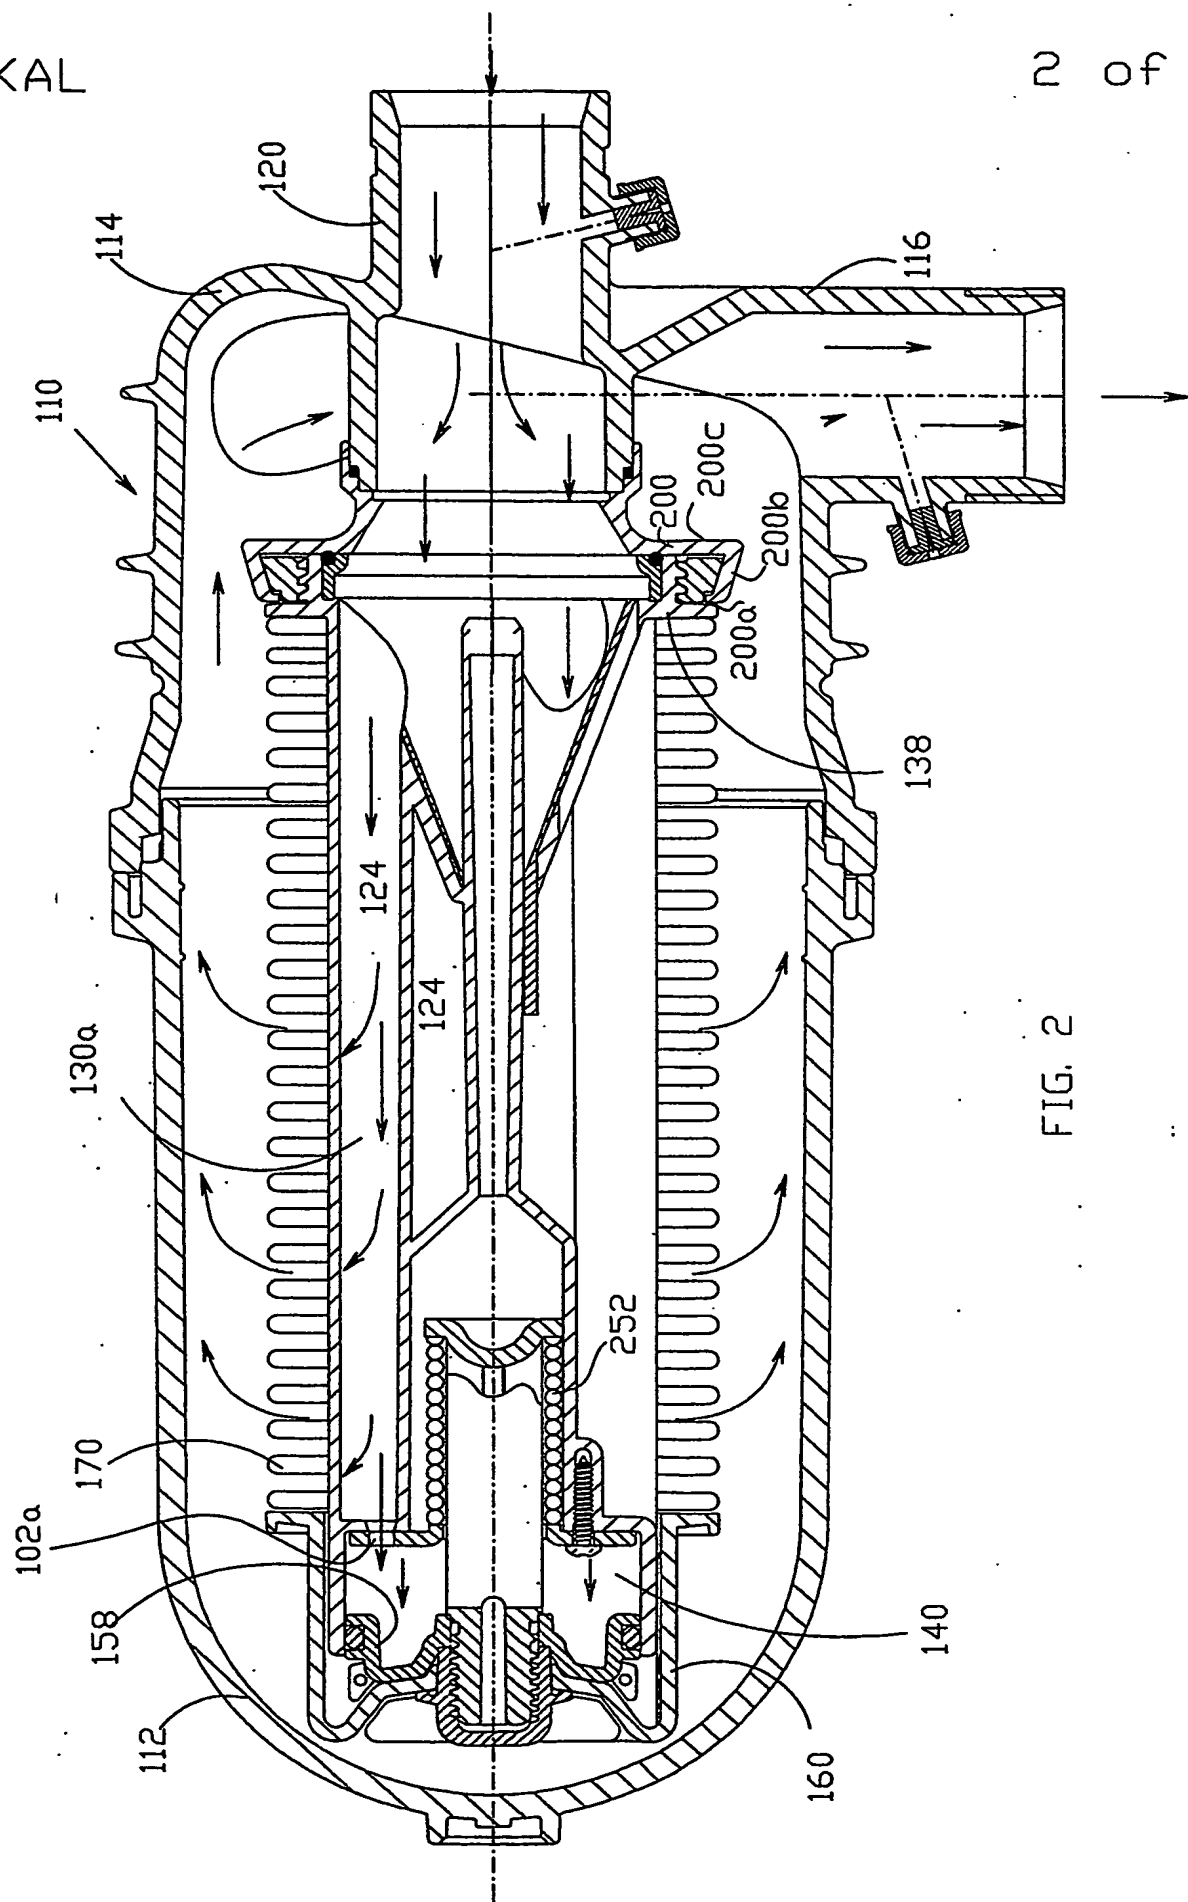


FIG. 3

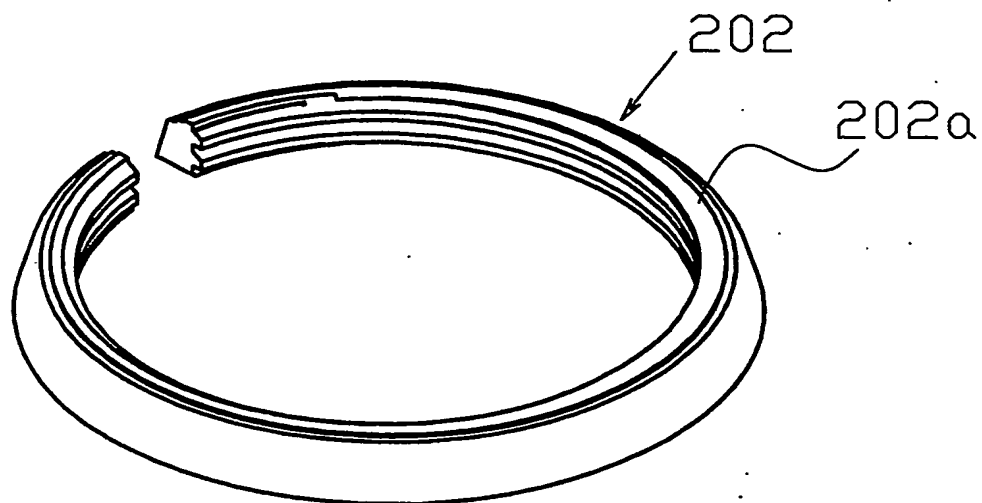


FIG. 4

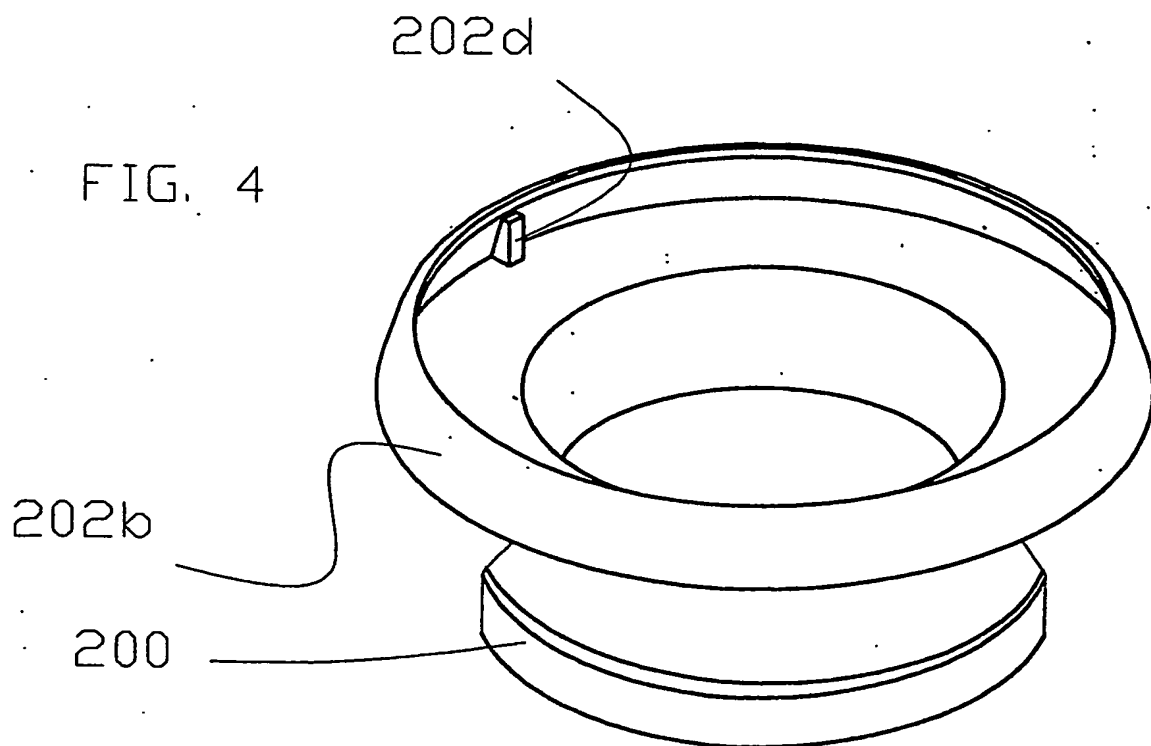


FIG. 5

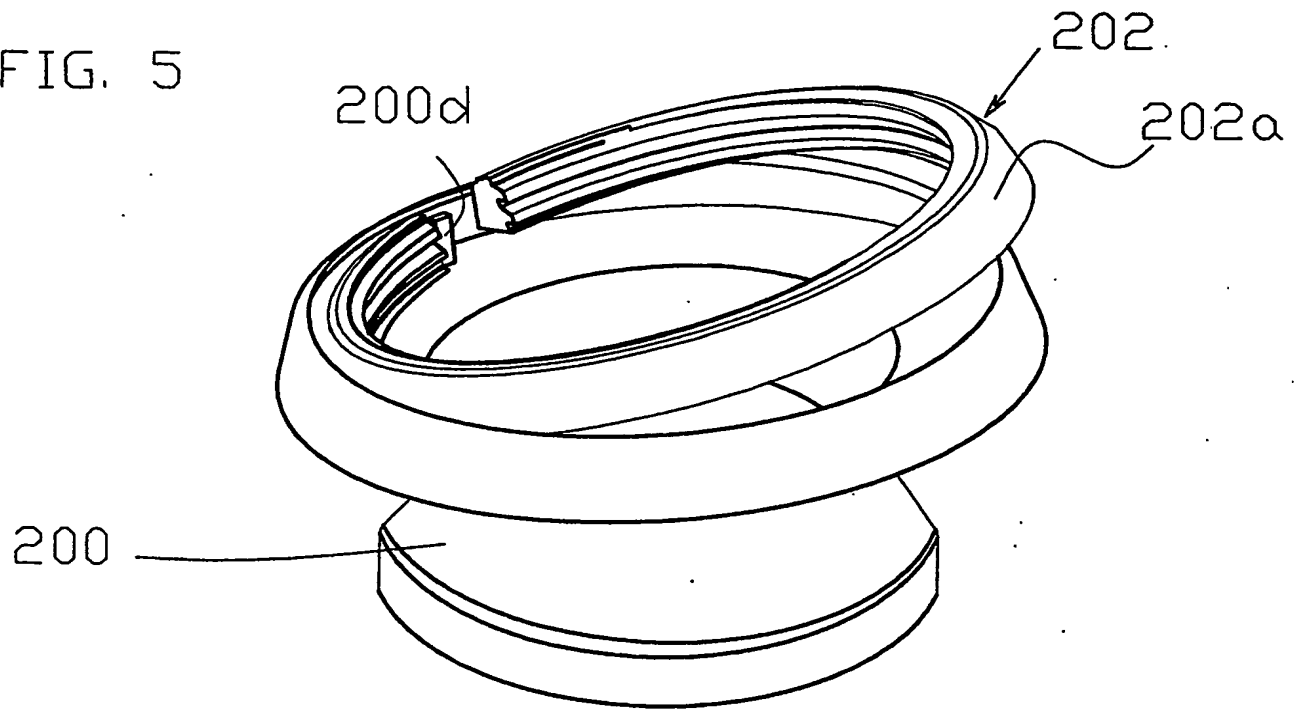
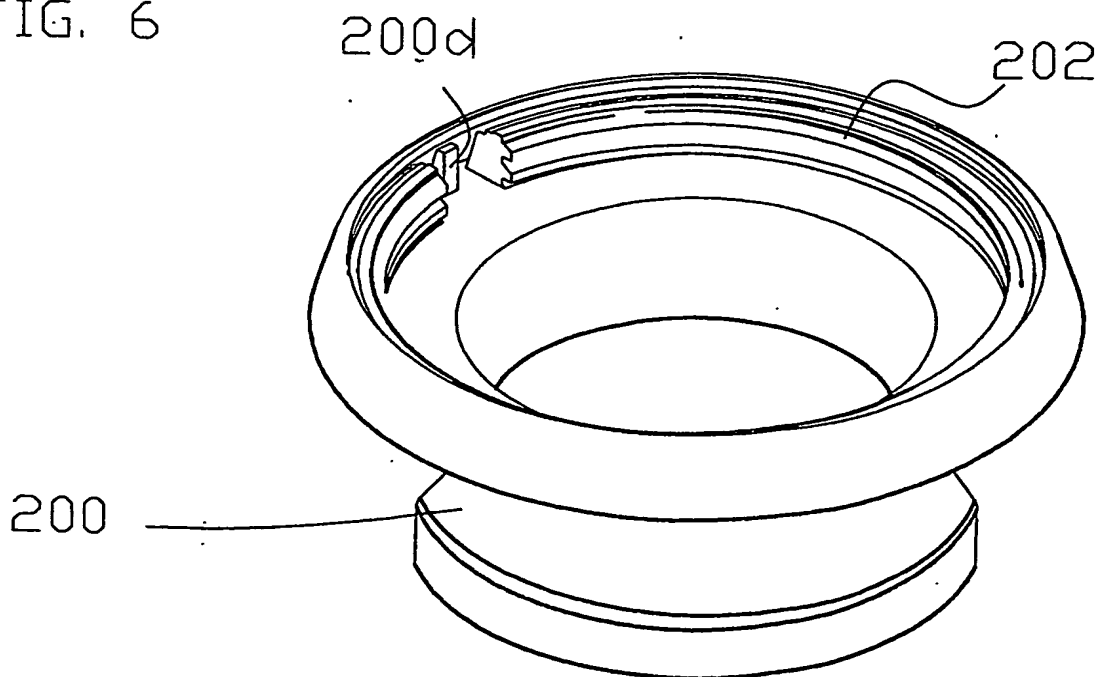
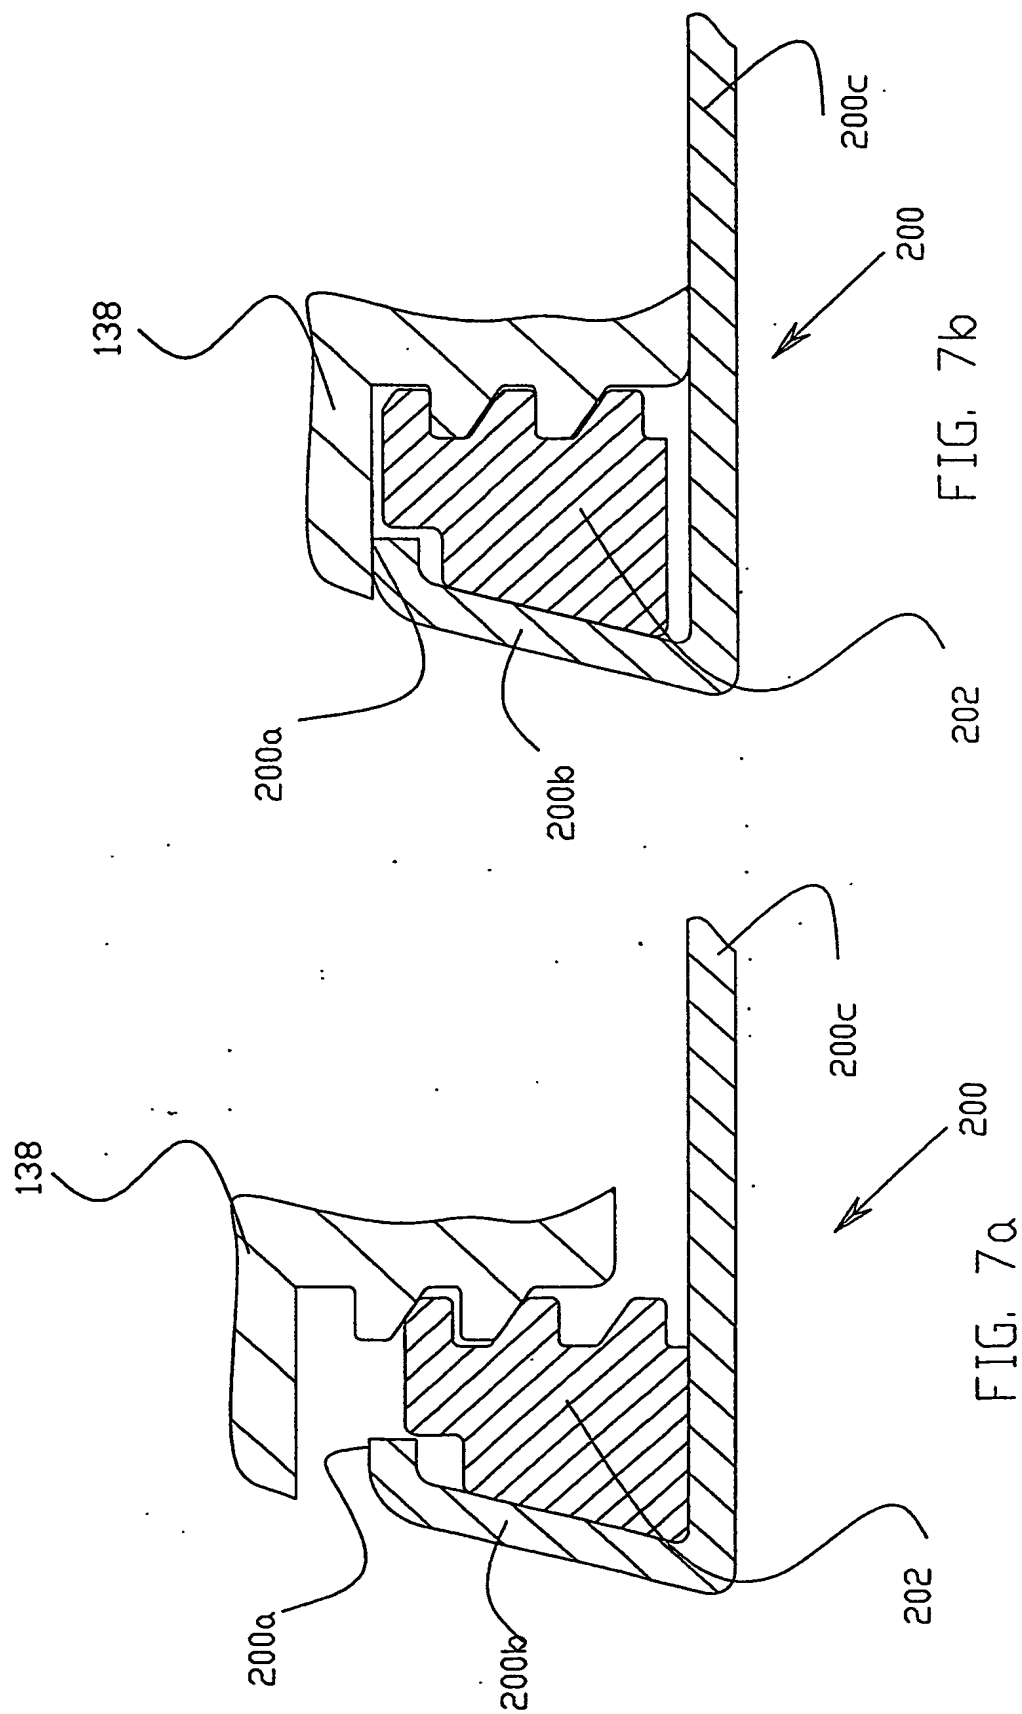
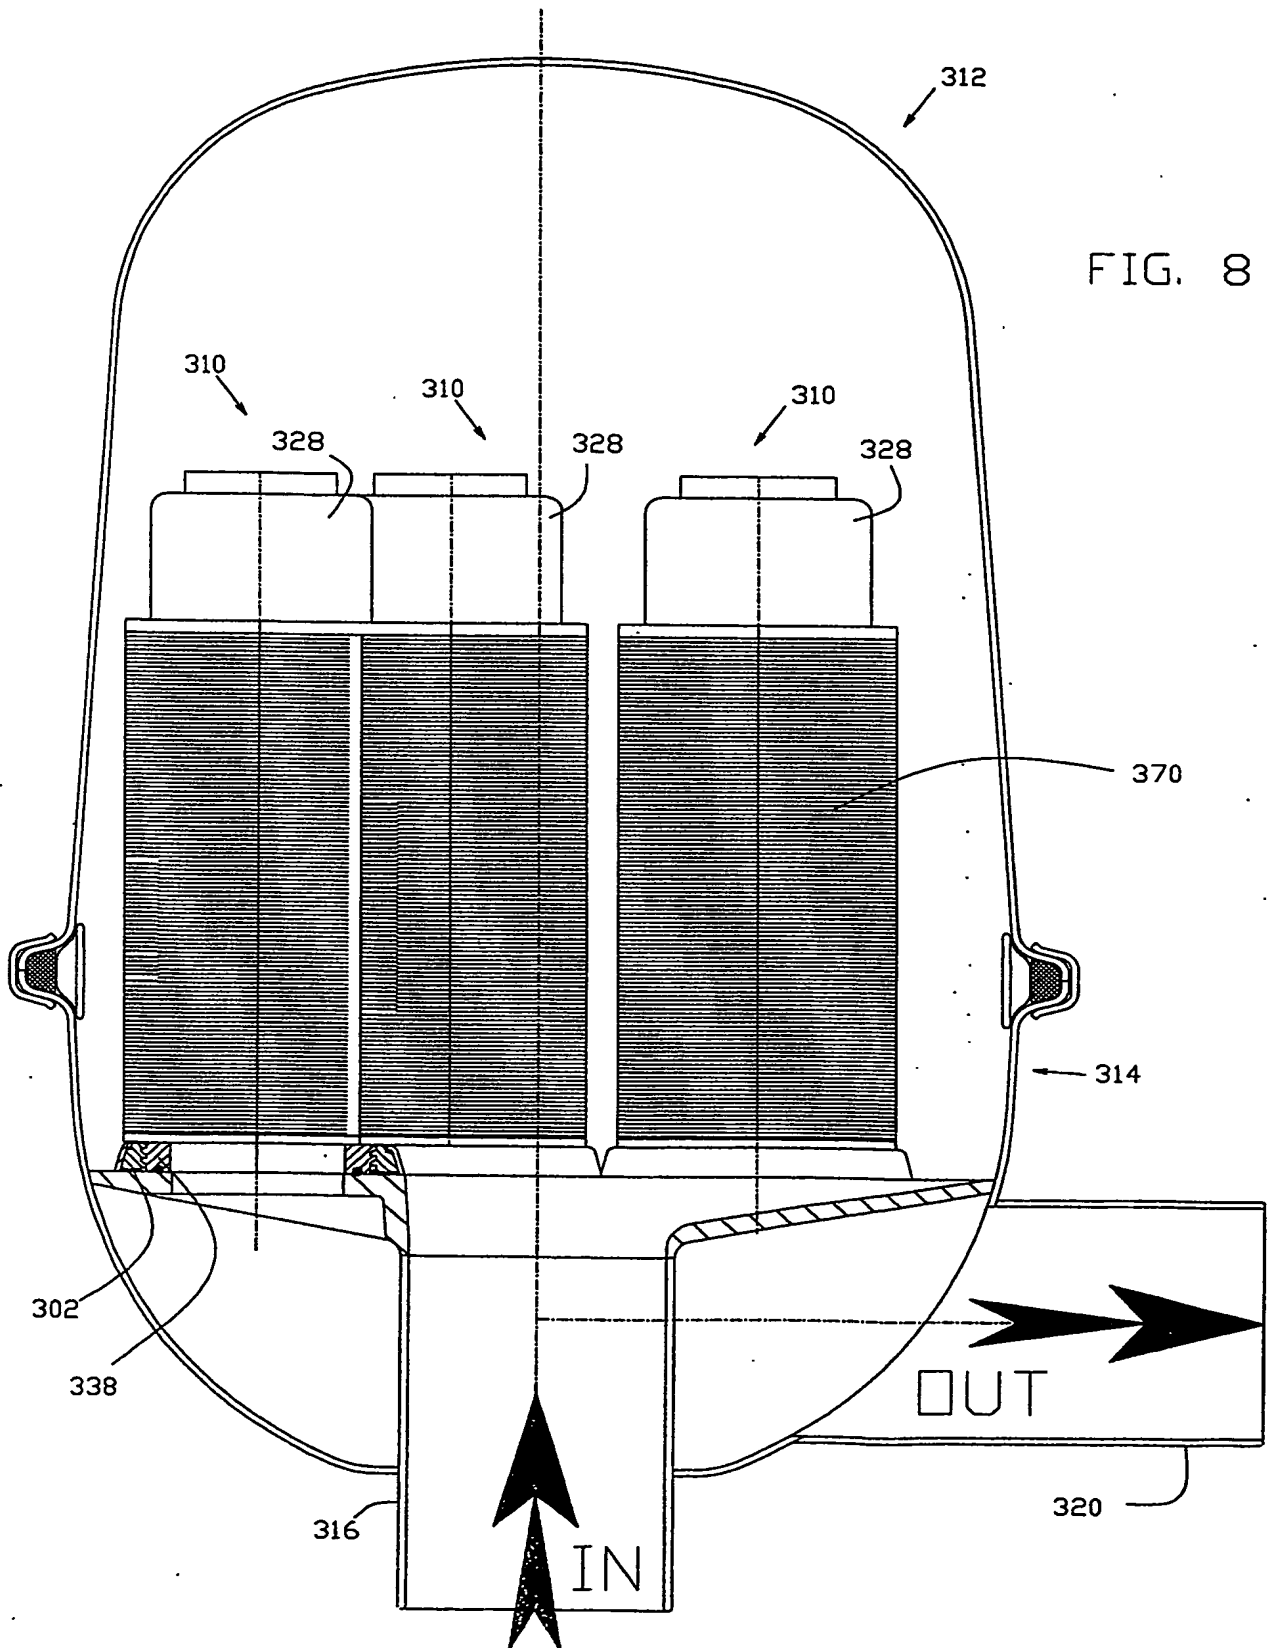


FIG. 6







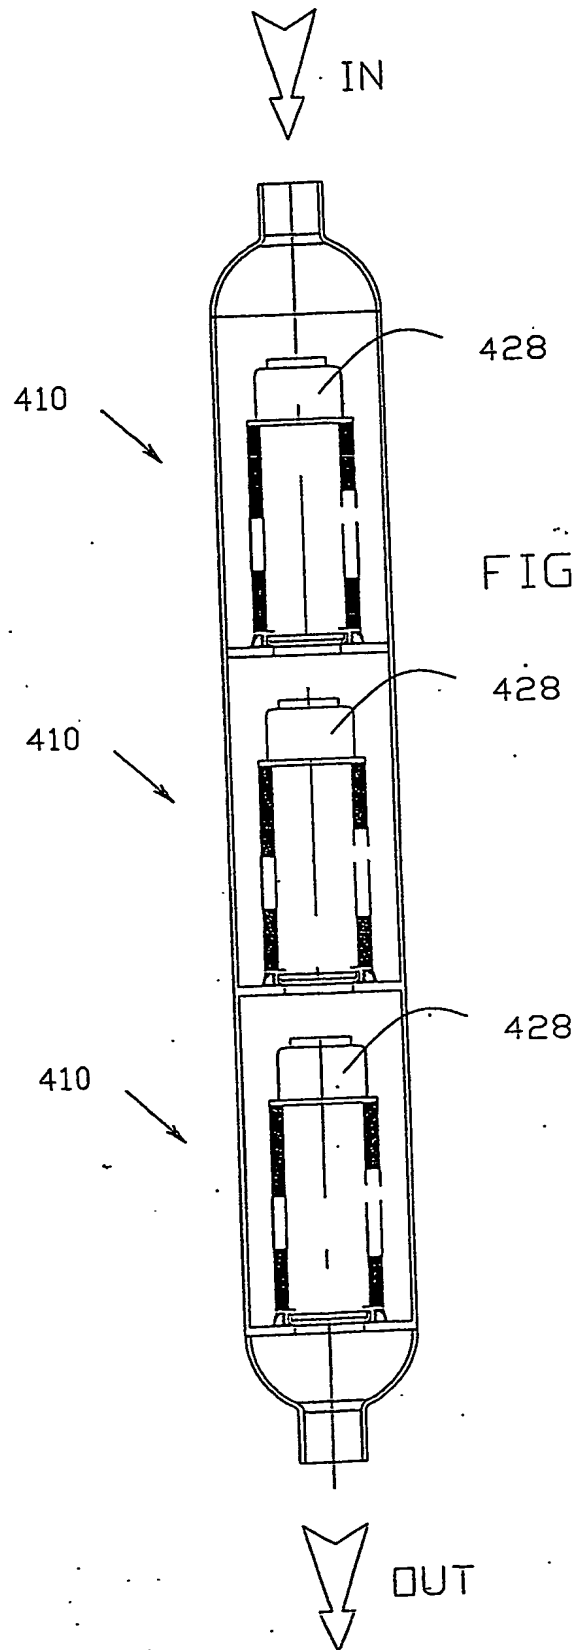


FIG. 9

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.